



Shenzhen Bewell Technology Co., Ltd.

www.bewellsafe.com

CONTENTS

Turnstile Gate

Parking Boom Barrier

Rising Bollard

Parking Lock

Tripod Turnstile Gate



Model: BW-TS850A

Model	BW-TS850A
Brand	Bewell
Chassis Size	420*330*980mm
Chassis Material	304 stainless steel
Chassis Thickness	1.5mm
Open Time	0.2s
Pass Speed	35 people/ min
Channel Width	550mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V



Model: BW-TS850B

Model	BW-TS850B
Brand	Bewell
Chassis Size	283*482*965mm
Chassis Material	304 stainless steel
Chassis Thickness	1.5mm
Open Time	0.2s
Pass Speed	35 people/ min
Channel Width	550mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V



Model: BW-TS850C

Model	BW-TS850C
Brand	Bewell
Chassis Size	420*510*980mm
Chassis Material	304 stainless steel
Chassis Thickness	1.5mm
Open Time	0.2s
Pass Speed	35 people/ min
Channel Width	550mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V

Tripod Turnstile Gate



Model: BW-TS950A

Model	BW-TS950A
Brand	Bewell
Chassis Size	1200*280*980mm
Chassis Material	304 stainless steel
Chassis Thickness	1.5mm
Open Time	0.2s
Pass Speed	35 people/ min
Channel Width	550mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V



Model: BW-TS950B

Model	BW-TS950B
Brand	Bewell
Chassis Size	1400*280*980mm
Chassis Material	304 stainless steel
Chassis Thickness	1.5mm
Open Time	0.2s
Pass Speed	35 people/ min
Channel Width	550mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V



Model: BW-TS950C

Model	BW-TS950C
Brand	Bewell
Chassis Size	1200*230*980mm
Chassis Material	304 stainless steel
Chassis Thickness	1.5mm
Open Time	0.2s
Pass Speed	35 people/ min
Channel Width	550mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V

Flap Turnstile Gate



Model: BW-TF510

Model	BW-TF510
Brand	Bewell
Chassis Size	1200*280*980mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.2mm / 1.5mm
Drive Motor	DC 24V
Pass Speed	40 people/ min
Channel Width	550mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way/ Double-way



Model: BW-TF511

Model	BW-TF511
Brand	Bewell
Chassis Size	1400*980*280mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.2mm / 1.5mm
Drive Motor	DC 24V
Pass Speed	40 people/ min
Channel Width	550mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way/ Double-way



Model: BW-TF512

Model	BW-TF512
Brand	Bewell
Chassis Size	1400*280*980mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.2mm / 1.5mm
Drive Motor	DC 24V / DC 24 Brushless
Pass Speed	40 people/ min
Channel Width	550mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way/ Double-way

Flap Turnstile Gate



Model: BW-TF513



Model: BW-TF514




Model: BW-TF515

Model	BW-TF513
Brand	Bewell
Chassis Size	1400*280*980mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.5mm
Drive Motor	DC 24V
Pass Speed	40 people/ min
Channel Width	550mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way/ Double-way

Model	BW-TF514
Brand	Bewell
Chassis Size	1400*310*980mm
Chassis Material	304 stainless steel, Acrylic, PU
Chassis Thickness	1.5mm
Drive Motor	DC 24V
Pass Speed	40 people/ min
Channel Width	900mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way/ Double-way

Model	BW-TF515
Brand	Bewell
Chassis Size	1400*280*980mm
Chassis Material	304 stainless steel, Acrylic, PU
Chassis Thickness	1.2mm / 1.5mm
Drive Motor	DC 24V / DC 24 Brushless
Pass Speed	40 people/ min
Channel Width	900mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way/ Double-way


Swing Turnstile Gate

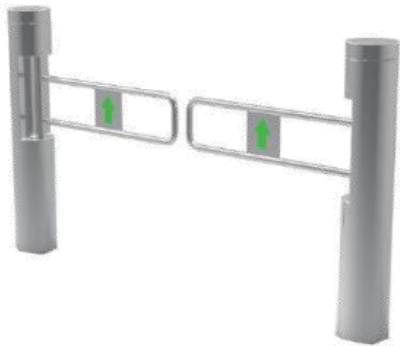

Model: BW-TB610



Model: BW-TB611

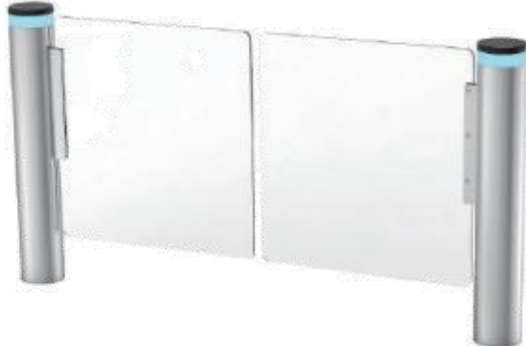

Model: BW-TB612

Model	BW-TB610
Brand	Bewell
Chassis Size	168*168*1050mm
Chassis Material	304 stainless steel
Chassis Thickness	1.2mm / 1.5mm
Drive Motor	DC 24V
Pass Speed	35-40 people/ min
Channel Width	600mm (Max 900mm)
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way/ Double-way

Model	BW-TB611
Brand	Bewell
Chassis Size	200*200*980mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.2mm / 1.5mm
Drive Motor	DC 24V Brushless
Pass Speed	35-40 people/ min
Channel Width	600mm (Max 1000mm)
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way/ Double-way

Model	BW-TB612
Brand	Bewell
Chassis Size	141*1000mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.5mm
Drive Motor	DC 24V Brushless
Pass Speed	35-40 people/ min
Channel Width	500-700mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way/ Double-way

Swing Turnstile Gate



Model: BW-TB613



Model: BW-TB614



Model: BW-TB615

Model	BW-TB613
Brand	Bewell
Chassis Size	1200*280*980mm
Chassis Material	304 stainless steel
Chassis Thickness	1.2mm / 1.5mm
Drive Motor	DC 24V
Pass Speed	35-40 people/ min
Channel Width	600mm (Max 1400mm)
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way/ Double-way

Model	BW-TB614
Brand	Bewell
Chassis Size	1400*190*980mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.2mm / 1.5mm
Drive Motor	DC 24V
Pass Speed	35-40 people/ min
Channel Width	600mm(Max 1000mm)
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way/ Double-way

Model	BW-TB615
Brand	Bewell
Chassis Size	1400*180*1000mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.2mm / 1.5mm
Drive Motor	DC 24V Brushless
Pass Speed	35-40 people/ min
Channel Width	600mm (Max 900mm)
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way/ Double-way

Swing Turnstile Gate



Model: BW-TB616



Model: BW-TB617



Model: BW-TB618

Model	BW-TB616
Brand	Bewell
Chassis Size	1200*185*1020mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.2mm / 1.5mm
Drive Motor	DC 24V Brushless
Pass Speed	35-40 people/ min
Channel Width	600mm (Max 850mm)
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way / Double-way

Model	BW-TB617
Brand	Bewell
Chassis Size	1500*180*980mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.5mm
Drive Motor	DC 24V Brushless
Pass Speed	35-40 people/ min
Channel Width	600mm (Max 900mm)
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way / Double-way

Model	BW-TB618
Brand	Bewell
Chassis Size	1400*185*1000mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.2mm / 1.5mm
Drive Motor	DC 24V Brushless
Pass Speed	35-40 people/ min
Channel Width	600mm (Max 900mm)
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way/ Double-way

Speed Turnstile Gate



Model: BW-TK410



Model: BW-TK411



Model: BW-TK412

Model	BW-TK410
Brand	Bewell
Chassis Size	1400*120*980mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.5mm
Drive Motor	DC 24V Brushless
Pass Speed	35-40 people/ min
Channel Width	600mm (Max 900mm)
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way / Double-way


Model	BW-TK411
Brand	Bewell
Chassis Size	1400*120*980mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.5mm
Drive Motor	DC 24V Brushless
Pass Speed	35-40 people/ min
Channel Width	600mm(Max 900mm)
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way / Double-way

Model	BW-TK412
Brand	Bewell
Chassis Size	1500*120*980mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.5mm
Drive Motor	DC 24V Brushless
Pass Speed	35-40 people/ min
Channel Width	600mm (Max 900mm)
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way / Double-way


Speed Turnstile Gate



Model: BW-TK413

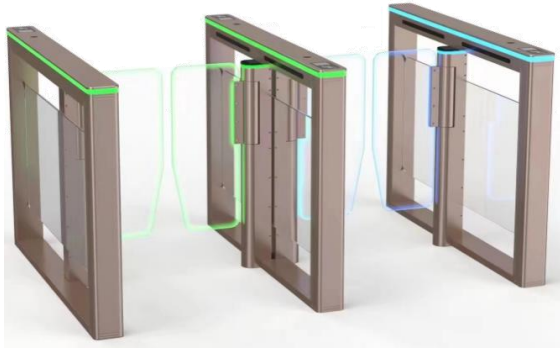

Model: BW-TK414

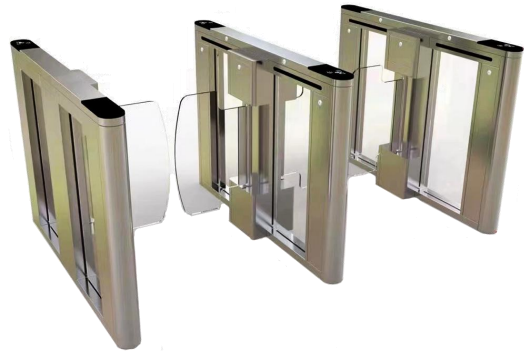

Model: BW-TK415

Model	BW-TK413
Brand	Bewell
Chassis Size	1500*130*980mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.5mm
Drive Motor	DC 24V Brushless
Pass Speed	35-40 people/ min
Channel Width	600mm (Max 900mm)
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way / Double-way


Model	BW-TK414
Brand	Bewell
Chassis Size	1400*100*980mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.5mm
Drive Motor	DC 24V Brushless
Pass Speed	35-40 people/ min
Channel Width	600mm(Max 900mm)
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way / Double-way

Model	BW-TK415
Brand	Bewell
Chassis Size	1400*100*980mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.5mm
Drive Motor	DC 24V Brushless
Pass Speed	35-40 people/ min
Channel Width	750mm (Max 900mm)
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way / Double-way


Speed Turnstile Gate



Model: BW-TK416

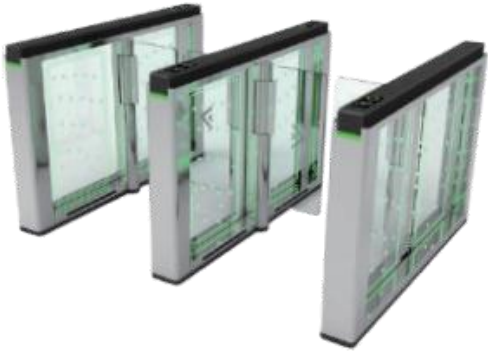

Model: BW-TK417

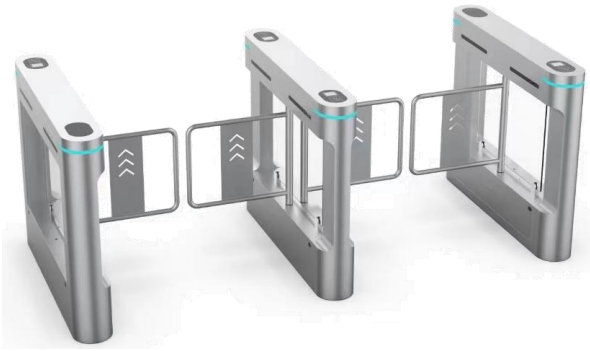

Model: BW-TK418

Model	BW-TK416
Brand	Bewell
Chassis Size	1400*120*980mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.5mm
Drive Motor	DC 24V Brushless
Pass Speed	35-40 people/ min
Channel Width	600mm (Max 900mm)
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way / Double-way

Model	BW-TK417
Brand	Bewell
Chassis Size	1500*160*1015mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.5mm
Drive Motor	DC 24V Brushless
Pass Speed	35-40 people/ min
Channel Width	600mm(Max 900mm)
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way / Double-way

Model	BW-TK418
Brand	Bewell
Chassis Size	1400*120*980mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.5mm
Drive Motor	DC 24V Brushless
Pass Speed	35-40 people/ min
Channel Width	600mm (Max 900mm)
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way / Double-way

Sliding Turnstile Gate



Model: BW-PY120



Model: BW-PY121



Model: BW-PY122

Model	BW-PY120
Brand	Bewell
Chassis Size	1400*350*980mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.2mm / 1.5mm
Drive Motor	DC 24V Brushless
Pass Speed	35-40 people/ min
Channel Width	550mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Open Method	ID/IC Card, Infrared sensor

Model	BW-PY121
Brand	Bewell
Chassis Size	1400*350*980mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.2mm / 1.5mm
Drive Motor	DC 24V Brushless
Pass Speed	35-40 people/ min
Channel Width	550mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Open Method	ID/IC Card, Infrared sensor

Model	BW-PY122
Brand	Bewell
Chassis Size	1400*350*980mm
Chassis Material	304 stainless steel, Acrylic
Chassis Thickness	1.5mm
Drive Motor	DC 24V Brushless
Pass Speed	35-40 people/ min
Channel Width	550mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Open Method	ID/IC Card, Infrared sensor

Full Height Turnstile Gate



Model: BW-TQ310A



Model: BW-TQ311A



Model: BW-TQ312A

Model	BW-TQ310A
Brand	Bewell
Chassis Size	1400*1200*2230mm
Chassis Material	304 stainless steel
Chassis Thickness	1.2mm / 1.5mm
Open Time	< 1s
Pass Speed	30 people/ min
Channel Width	600mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way / Double-way

Model	BW-TQ311A
Brand	Bewell
Chassis Size	1500*1400*2300mm
Chassis Material	304 stainless steel
Chassis Thickness	1.2mm / 1.5mm
Open Time	< 1s
Pass Speed	30 people/ min
Channel Width	600mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way / Double-way

Model	BW-TQ312A
Brand	Bewell
Chassis Size	1450*1450*2200mm
Chassis Material	304 stainless steel
Chassis Thickness	1.2mm / 1.5mm
Open Time	< 1s
Pass Speed	30 people/ min
Channel Width	600mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way / Double-way

Full Height Turnstile Gate



Model: BW-TQ310B



Model: BW-TQ311B



Model: BW-TQ312B

Model	BW-TQ310B
Brand	Bewell
Chassis Size	2200*1350*2230mm
Chassis Material	304 stainless steel
Chassis Thickness	1.2mm / 1.5mm
Open Time	< 1s
Pass Speed	30 people/ min
Channel Width	600mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way / Double-way

Model	BW-TQ311B
Brand	Bewell
Chassis Size	2200*1350*2300mm
Chassis Material	304 stainless steel
Chassis Thickness	1.2mm / 1.5mm
Open Time	< 1s
Pass Speed	30 people/ min
Channel Width	600mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way / Double-way

Model	BW-TQ312B
Brand	Bewell
Chassis Size	2300*1450*2250mm
Chassis Material	304 stainless steel
Chassis Thickness	1.2mm / 1.5mm
Open Time	< 1s
Pass Speed	30 people/ min
Channel Width	600mm
Operating Temperature	-20 - +70℃
Input Voltage	100 - 240V
Pass Way	Single-way / Double-way

Parking Boom Barrier



Model: BW-PB301

Model	BW-PB301
Brand	Bewell
Chassis Size	320*245*985mm
Color	Black / Gold / Silver
Chassis Thickness	1.5mm
Open Time	1- 6s (adjustable)
Motor Power	120W - 150W (Optional)
Working Power Supply	220V
Operating Temperature	-40 - +85℃
Remote Control Distance	≥ 30m
Arm Optional	Straight / Telescopic Arm, Folding Arm, Fence Arm
Boom direction	Exchangeable
MTBF	10 million cycles



Model: BW-PB302

Model	BW-PB302
Brand	Bewell
Chassis Size	355*255*1035mm
Color	Yellow / Gold / Silver
Chassis Thickness	1.5mm
Open Time	1- 6s (adjustable)
Motor Power	120W - 150W (Optional)
Working Power Supply	220V
Operating Temperature	-40 - +85℃
Remote Control Distance	≥ 30m
Arm Optional	Straight / Telescopic Arm, Folding Arm, Fence Arm
Boom direction	Exchangeable
MTBF	10 million cycles

Parking Boom Barrier



Model: BW-PB303

Model	BW-PB303
Brand	Bewell
Chassis Size	313*382*1030mm
Color	Gold / Silver / Red
Chassis Thickness	1.5mm
Open Time	1 - 6s (adjustable)
Motor Power	120W - 150W (Optional)
Working Power Supply	220V
Operating Temperature	-40 - +85°C
Remote Control Distance	≥ 30m
Arm Optional	Straight / Telescopic Arm, Folding Arm, Fence Arm
Boom direction	Exchangeable
MTBF	10 million cycles



Model: BW-PB304

Model	BW-PB304
Brand	Bewell
Chassis Size	313*382*980mm
Color	Black / Grey / Red
Chassis Thickness	1.5mm
Open Time	1 - 6s (adjustable)
Motor Power	120W - 150W (Optional)
Working Power Supply	220V
Operating Temperature	-40 - +85°C
Remote Control Distance	≥ 30m
Arm Optional	Straight / Telescopic Arm, Folding Arm, Fence Arm
Boom direction	Exchangeable
MTBF	10 million cycles

Parking Boom Barrier



Model: BW-PB305

Model	BW-PB305
Brand	Bewell
Chassis Size	320*220*980mm
Color	Yellow / Red / Black
Chassis Thickness	1.5mm
Open Time	1 - 6s (adjustable)
Motor Power	120W - 150W (Optional)
Working Power Supply	220V
Operating Temperature	-40 - +85°C
Remote Control Distance	≥ 30m
Arm Optional	Straight / Telescopic Arm, Folding Arm, Fence Arm
Boom direction	Exchangeable
MTBF	10 million cycles



Model: BW-PB306

Model	BW-PB306
Brand	Bewell
Chassis Size	340*258*980mm
Color	Gold / Yellow / Silver
Chassis Thickness	1.5mm
Open Time	1 - 6s (adjustable)
Motor Power	120W - 150W (Optional)
Working Power Supply	220V
Operating Temperature	-40 - +85°C
Remote Control Distance	≥ 30m
Arm Optional	Straight / Telescopic Arm, Folding Arm, Fence Arm
Boom direction	Exchangeable
MTBF	10 million cycles

Parking Boom Barrier



Model: BW-PB307


Model	BW-PB307
Brand	Bewell
Chassis Size	324*245*1011mm
Color	Yellow / Silver / Gold
Chassis Thickness	1.5mm
Open Time	1 - 6s (adjustable)
Motor Power	120W - 150W (Optional)
Working Power Supply	220V
Operating Temperature	-40 - +85°C
Remote Control Distance	≥ 30m
Arm Optional	Straight / Telescopic Arm, Folding Arm, Fence Arm
Boom direction	Exchangeable
MTBF	10 million cycles



Model: BW-PB308


Model	BW-PB308
Brand	Bewell
Chassis Size	320*220*970mm
Color	Black / Silver
Chassis Thickness	1.5mm
Open Time	0.8- 3s (adjustable)
Motor Power	120W - 150W (Optional)
Working Power Supply	220V
Operating Temperature	-40 - +85°C
Remote Control Distance	≥ 30m
Arm Optional	Straight / Telescopic Arm, Folding Arm, Fence Arm
Boom direction	Exchangeable
MTBF	10 million cycles

Parking Boom Barrier

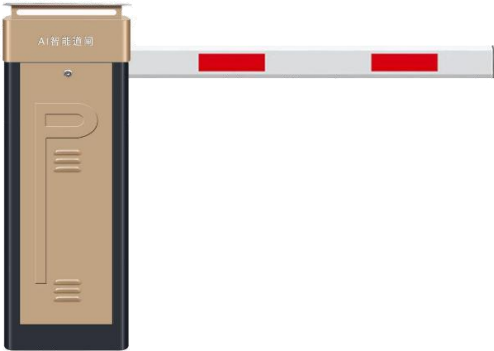

Model: BW-PB309


Model	BW-PB309
Brand	Bewell
Chassis Size	320*245*985mm
Color	Black / Gold / Silver
Chassis Thickness	1.5mm
Open Time	1- 6s (adjustable)
Motor Power	120W - 150W (Optional)
Working Power Supply	220V
Operating Temperature	-40 - +85℃
Remote Control Distance	≥ 30m
Arm Optional	Straight / Telescopic Arm, Folding Arm, Fence Arm
Boom direction	Exchangeable
MTBF	10 million cycles

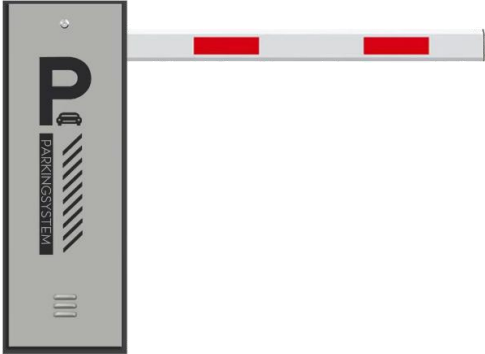

Model: BW-PB310

Model	BW-PB310
Brand	Bewell
Chassis Size	320*225*970mm
Color	Black / Silver
Chassis Thickness	1.5mm
Open Time	0.8- 3s (adjustable)
Motor Power	120W - 150W (Optional)
Working Power Supply	220V
Operating Temperature	-40 - +85℃
Remote Control Distance	≥ 30m
Arm Optional	Straight / Telescopic Arm, Folding Arm, Fence Arm
Boom direction	Exchangeable
MTBF	10 million cycles

Parking Boom Barrier

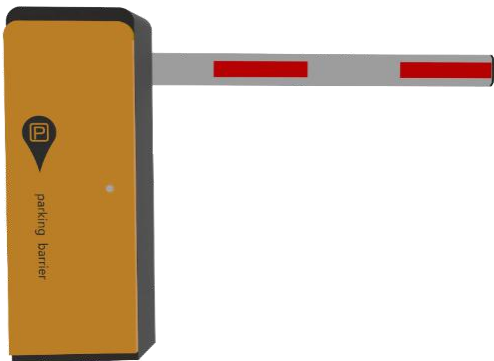

Model: BW-PB311


Model	BW-PB311
Brand	Bewell
Chassis Size	340*245*970mm
Color	Yellow
Chassis Thickness	1.5mm
Open Time	1 - 6s (adjustable)
Motor Power	120W - 150W (Optional)
Working Power Supply	220V
Operating Temperature	-40 - +85°C
Remote Control Distance	≥ 30m
Arm Optional	Straight / Telescopic Arm, Folding Arm, Fence Arm
Boom direction	Exchangeable
MTBF	10 million cycles



Model: BW-PB312


Model	BW-PB312
Brand	Bewell
Chassis Size	320*225*980mm
Color	Yellow
Chassis Thickness	1.5mm
Open Time	1 - 6s (adjustable)
Motor Power	120W - 150W (Optional)
Working Power Supply	220V
Operating Temperature	-40 - +85°C
Remote Control Distance	≥ 30m
Arm Optional	Straight / Telescopic Arm, Folding Arm, Fence Arm
Boom direction	Exchangeable
MTBF	10 million cycles

Parking Boom Barrier

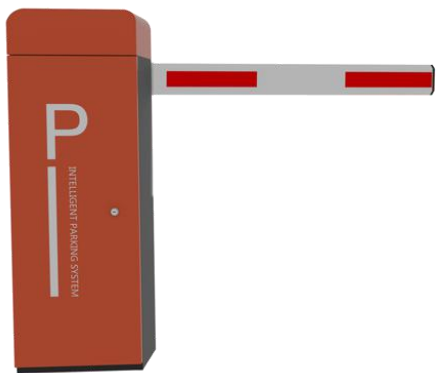

Model: BW-PB313

Model	BW-PB313
Brand	Bewell
Chassis Size	340*260*1000mm
Color	Red
Chassis Thickness	1.5mm
Open Time	1 - 6s (adjustable)
Motor Power	120W - 150W (Optional)
Working Power Supply	220V
Operating Temperature	-40 - +85°C
Remote Control Distance	≥ 30m
Arm Optional	Straight / Telescopic Arm, Folding Arm, Fence Arm
Boom direction	Exchangeable
MTBF	10 million cycles

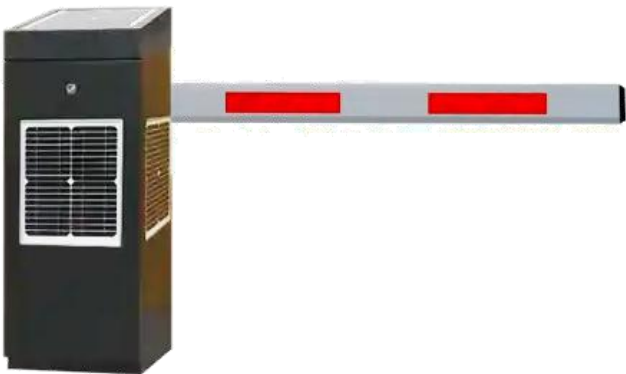

Model: BW-PB314

Model	BW-PB314
Brand	Bewell
Chassis Size	380*390*1070mm
Color	Black
Chassis Thickness	1.5mm
Open Time	2 - 6s (adjustable)
Motor Power	120W - 150W (Optional)
Working Power Supply	220V
Operating Temperature	-40 - +85°C
Remote Control Distance	≥ 30m
Arm Optional	Straight / Telescopic Arm, Folding Arm, Fence Arm
Boom direction	Exchangeable
MTBF	10 million cycles

Parking Boom Barrier



Model: BW-PB315

Model	BW-PB315
Brand	Bewell
Chassis Size	686*450*1280mm
Color	Yellow / Greay / Blue
Chassis Thickness	1.5mm
Open Time	3 - 6s (adjustable)
Motor Power	120W - 150W (Optional)
Working Power Supply	220V
Operating Temperature	-40 - +85℃
Remote Control Distance	≥ 30m



Model: BW-PB316

Model	BW-PB316
Brand	Bewell
Chassis Size	450**340*1180mm
Color	Grey
Chassis Thickness	1.5mm
Open Time	3 - 6s (adjustable)
Motor Power	120W - 150W (Optional)
Working Power Supply	220V
Operating Temperature	-40 - +85℃
Remote Control Distance	≥ 30m

Parking Boom Barrier



Model: BW-PB317

Model	BW-PB317
Brand	Bewell
Chassis Size	320*220*970mm
Color	Yellow
Chassis Thickness	1.5mm
Open Method	Manual
Arm Optional	Straight / Telescopic Arm, Folding Arm, Fence Arm



DC 24V Brushless Motor



DC 24V Brushless Motor



AC 110V-240V Motor



AC 110V-240V Motor

Parking Boom Barrier




Octagon Straight Arm



Oval Straight Arm



Telescopic Arm

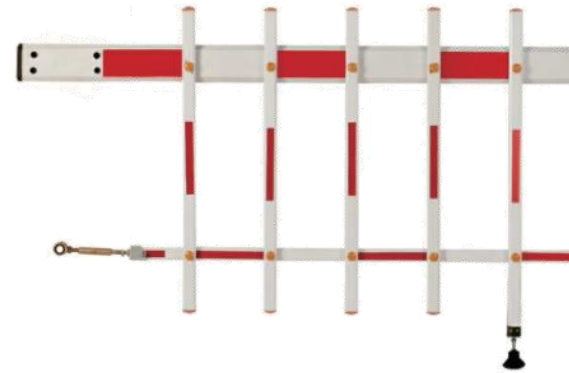


Two Fence Arm



Bracket



Anti-collision Arm

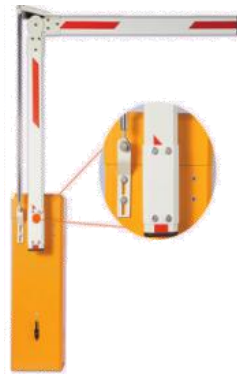

90° Folding Arm



180° Folding Arm



Three Fence Arm



BS Iron Bracket

Rising Bollard



Model: BW-RBA219

Model	BW-RB219
Brand	Bewell
Cylinder Diameter	219mm (168mm / 273mm Optional)
Rising Height	600mm
Cylinder Thickness	6mm
Rising Time	2 - 4s (adjustable)
Drive Motor	Electro-hydraulic
Remote Control Distance	50 - 20m
Anti-collision Speed	65km/h
Anti-impact Strength	1108KJ
Waterproof Level	IP68



Model: BW-RBS219

Model	BW-RB219
Brand	Bewell
Cylinder Diameter	219mm (168mm / 273mm Optional)
Rising Height	600mm
Cylinder Thickness	6mm
Rising Structure	Semi-automatic
Anti-collision Speed	65km/h
Anti-impact Strength	1108KJ
Waterproof Level	IP68

Parking Lock



Model: BW-PL101

Model	BW-PL101
Brand	Bewell
Dimension	450*450*400mm
Battery Type	Alkaline battery / Lithium battery / Lead-acid battery / Solar battery, Optional
Operation	Remote control
Remote Control Distance	15m
Weight	7.5KG(G.W)/7KG(N.W)